Finisar

Product Specification

10Gb/s 80km Multi-Rate XFP Optical Transceiver

FTLX1812M3BCL

PRODUCT FEATURES

- Supports 8.5Gb/s to 11.32Gb/s bit rates
- Hot-pluggable XFP footprint
- Maximum link length of 80km
- RoHS-6 compliant (lead-free)
- Temperature-stabilized EML transmitter
- Duplex LC connector
- Power dissipation <3.5W
- Built-in digital diagnostic functions
- XFI Loop-back Support
- Temperature range: 0°C to 70°C

APPLICATIONS

- SONET OC-192 / SDH STM-64 ITU-T G.959.1 P1L1-2D2
- IEEE 802.3ae 10GBASE-ZR/ZW 80km 10G Ethernet
- Extended 80km, 10GFC 1200-SM-LL-L and 8GFC 800-SM-LC-L
- ITU-T G.709 OTN/FEC (OTU2, OTU1e, and OTU2e)
- 10Gb/s CPRI

Finisar's 80km FTLX1812M3BCL Small Form Factor 10Gb/s (XFP) transceivers comply with the current XFP Multi-Source Agreement (MSA) Specification[1]. They are a true multi-protocol transceiver complying with 80km SONET OC-192 and SDH STM-64 per ITU-T G.959.1: P1L1-2D2, and also support 10GBASE-ZR/ZW 80km 10Gb/s Ethernet, 10Gb/s Fibre Channel 1200-SM-LL-L, 8Gb/s Fibre Channel 800-SM-LC-L, 10Gb/s CPRI, and all ITU-T G.709 FEC/OTN protocols up to 11.32Gb/s. Digital diagnostics functions are available via a 2-wire serial interface, as specified in the XFP MSA. The transceiver is RoHS compliant, and lead free per Directive 2002/95/EC[3].

PRODUCT SELECTION

FTLX1812M3BCL

I. Pin Descriptions

Pin	Logic	Symbol	Name/Description	Ref.
1		GND	Module Ground	1
2		VEE5	Optional –5.2 Power Supply – **Not required**	
3	LVTTL-I	Mod-Desel	Module De-select; When held low allows the module to respond to 2-wire serial interface commands	
4	LVTTL-O	$\overline{\text{Interrupt}}$	Interrupt (bar); Indicates presence of an important condition which can be read over the serial 2-wire interface	2
5	LVTTL-I	TX_DIS	Transmitter Disable; Transmitter laser source turned off	
6		VCC5	+5 Power Supply	
7		GND	Module Ground	1
8		VCC3	+3.3V Power Supply	
9		VCC3	+3.3V Power Supply	
10	LVTTL-I	SCL	Serial 2-wire interface clock	2
11	LVTTL-I/O	SDA	Serial 2-wire interface data line	2
12	LVTTL-O	Mod_Abs	Module Absent; Indicates module is not present. Grounded in the module.	2
13	LVTTL-O	Mod_NR	Module Not Ready; Finisar defines it as a logical OR between RX_LOS and Loss of Lock in TX/RX.	2
14	LVTTL-O	RX_LOS	Receiver Loss of Signal indicator	2
15		GND	Module Ground	1
16		GND	Module Ground	1
17	CML-O	RD-	Receiver inverted data output	
18	CML-O	RD+	Receiver non-inverted data output	
19		GND	Module Ground	1
20		VCC2	+1.8V Power Supply – **Not required**	
21	LVTTL-I	P_Down/RST	Power Down; When high, places the module in the low power stand-by mode and on the falling edge of P_Down initiates a module reset	
			Reset; The falling edge initiates a complete reset of the module including the 2-wire serial interface, equivalent to a power cycle.	
22		VCC2	+1.8V Power Supply – **Not required**	
23		GND	Module Ground	1
24	PECL-I	RefCLK+	Reference Clock non-inverted input, AC coupled on the host board – **Not required**	
25	PECL-I	RefCLK-	Reference Clock inverted input, AC coupled on the host board – **Not required**	
26		GND	Module Ground	1
27		GND	Module Ground	1
28	CML-I	TD-	Transmitter inverted data input	
29	CML-I	TD+	Transmitter non-inverted data input	
30		GND	Module Ground	1

Notes:
1. Module circuit ground is isolated from module chassis ground within the module.
2. Open collector; should be pulled up with 4.7k – 10kohms on host board to a voltage between 3.15V and 3.6V.

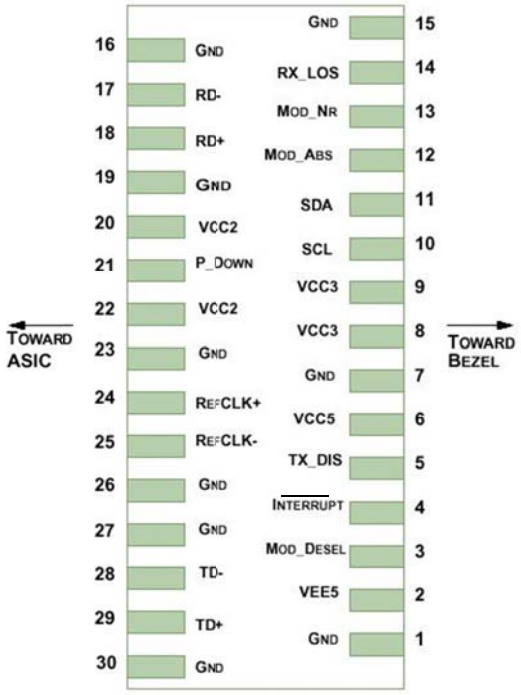

Diagram of Host Board Connector Block Pin Numbers and Names

II. Absolute Maximum Ratings

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Maximum Supply Voltage #1	Vcc3	-0.5		4.0	V	
Maximum Supply Voltage #2	Vcc5	-0.5		6.0	V	
Storage Temperature	T_S	-40		85	°C	
Case Operating Temperature	T_{OP}	0		70	°C	
Receiver Damage Threshold	Rx_{Damage}	+5			dBm	1

Note #1: spec based on steady-state optical power.

III. Electrical Characteristics (T_{OP} = 0 to 70 °C, V_{CC5} = 4.75 to 5.25 Volts)

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Supply Voltage #1	Vcc5	4.75		5.25	V	
Supply Voltage #2	Vcc3	3.13		3.46	V	
Supply Current – Vcc3 supply	Icc3			750	mA	
Supply Current – Vcc5 supply	Icc5			350	mA	
Module total power	P			3.5	W	1
Transmitter						
Input differential impedance	R_{in}		100		Ω	2
Differential data input swing	Vin,pp	120		820	mV	
Transmit Disable Voltage	V_D	2.0		Vcc	V	3
Transmit Enable Voltage	V_{EN}	GND		GND+ 0.8	V	
Transmit Disable Assert Time				100	us	
Receiver						
Differential data output swing	Vout,pp	340	650	850	mV	4
Data output rise time	t_r			40	ps	5
Data output fall time	t_f			40	ps	5
LOS Fault	$V_{LOS\ fault}$	Vcc – 0.5		Vcc_{HOST}	V	6
LOS Normal	$V_{LOS\ norm}$	GND		GND+0.5	V	6
Power Supply Rejection	PSR	See Note 6 below				7

Notes:
1. Maximum total power value is specified across the full temperature and voltage range.
2. After internal AC coupling.
3. Or open circuit.
4. Into 100 ohms differential termination.
5. 20 – 80 %
6. Loss Of Signal is open collector to be pulled up with a 4.7k – 10kohm resistor to 3.15 – 3.6V. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
7. Per Section 2.7.1. in the XFP MSA Specification[1].

IV. Optical Characteristics (EOL, T_{OP} = -0 to 70°C, V_{CC5} = 4.75 to 5.25 Volts)

Please note that the Transmitter of the FTLX1812M3BCL becomes operational within 5 seconds of power-up. This is due to the time required for the EML to reach its optimum operating temperature.

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Transmitter						
Output Opt. Pwr: 9/125 SMF	P_{OUT}	0		+4	dBm	
Optical Extinction Ratio	ER	9			dB	
Center Wavelength	λ_C	1530		1565	pm	
Sidemode Supression ratio	SSR_{min}	30			dB	
Tx Jitter (SONET) 20kHz-80MHz	Tx_{j1}			0.3	UI	1
Tx Jitter (SONET) 4MHz – 80MHz	Tx_{j2}			0.1	UI	1
Relative Intensity Noise	RIN			-130	dB/Hz	
Receiver						
Receiver Sensitivity @ 9.95Gb/s	R_{SENS2}			-24	dBm	2,3
Receiver Sensitivity @ 10.7Gb/s	R_{SENS3}			-24	dBm	2,3
Receiver Sensitivity @ 11.1Gb/s	R_{SENS4}			-23	dBm	2,3
Receiver Sensitivity @ 11.32Gb/s	R_{SENS5}			-22.5	dBm	2,3
Maximum Input Power	P_{MAX}	-7			dBm	
Optical Center Wavelength	λ_C	1270		1600	nm	
Receiver Reflectance	R_{rx}			-27	dB	
Path penalty at 1600 ps/nm @ 9.95Gb/s	DP_2			2	dB	4
Path penalty at 1600 ps/nm @ 10.7Gb/s	DP_3			3	dB	4
Path penalty at 1450 ps/nm @ 11.1Gb/s (BER 1e-4)	DP_4			3	dB	4
Path penalty at 1300 ps/nm @ 11.32Gb/s (BER 1e-4)	DP_5			3	dB	4
LOS De-Assert	LOS_D			-30	dBm	
LOS Assert	LOS_A	-37		-33	dBm	
LOS Hysteresis		0.5			dB	

Notes:
1. GR-253-CORE Issue 4
2. Measured at 1528-1600nm with worst ER; BER<10^{-12}; PRBS31.
3. Equivalent to –22.1 dBm OMA at ER = 9 dB.
4. Dispersion penalty is measured in loopback using 18 ps/(nm*km) fiber (SMF-28).

V. General Specifications

Parameter	Symbol	Min	Typ	Max	Units	Ref.
Bit Rate	BR	8.5		11.32	Gb/s	1
Bit Error Ratio	BER			10^{-12}		2
Max. Supported Link Length	L_{MAX}		80		km	1

Notes:
1. ITU-T G.959.1 P1L1-2D2 SONET/SDH, 10GBASE-ZR/ZW 10G Ethernet, 10G Fibre Channel 1200-SM-LL-L, ITU-T G.709 OTN/FEC (OTU2), 10GBASE-ZR/ZW 10G Ethernet OTN/FEC (OTU1e and OTU2e), and 8G Fibre Channel 800-SM-LC-L
2. Tested with a $2^{31} – 1$ PRBS

VI. Environmental Specifications

Finisar XFP transceivers have an operating temperature range from 0°C to +70°C case temperature.

Parameter	Symbol	Min	Typ	Max	Units	Ref.
Case Operating Temperature	T_{op}	0		70	°C	
Storage Temperature	T_{sto}	-40		85	°C	

VII. Regulatory Compliance

Finisar XFP transceivers are Class 1 Laser Products. They are certified per the following standards:

Feature	Agency	Standard	Certificate Number
Laser Eye Safety	FDA/CDRH	CDRH 21 CFR 1040 and Laser Notice 50	9210176-77
Laser Eye Safety	TÜV	EN 60825-1: 2007, EN60825-2:2004+A1 IEC 60825-1: 2007 (2nd Edition) IEC 60825-2: 2010 (3rd Edition)	R72101686
Electrical Safety	TÜV	EN 60950:2006+A11	R72101686
Electrical Safety	UL/CSA	CLASS 3862.07 CLASS 3862.87	2283290

Copies of the referenced certificates are available at Finisar Corporation upon request.

VIII. Digital Diagnostics Functions

As defined by the XFP MSA[1], Finisar XFP transceivers provide digital diagnostic functions via a 2-wire serial interface, which allows real-time access to the following operating parameters:

- Transceiver temperature
- Laser bias current
- Transmitted optical power
- Received optical power
- Transceiver supply voltage

It also provides a sophisticated system of alarm and warning flags, which may be used to alert end-users when particular operating parameters are outside of a factory-set normal range.

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through the 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL pin) is generated by the host. The positive edge clocks data into the XFP transceiver into those segments of its memory map that are not write-protected. The negative edge clocks data from the XFP transceiver. The serial data signal (SDA pin) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially. The 2-wire serial interface provides sequential or random access to the 8 bit parameters, addressed from 000h to the maximum address of the memory.

For more detailed information, including memory map definitions, please see the XFP MSA documentation[1].

8.5Gb/s Fibre-Channel Support:

To operate the FTLX1812M3BCL at 8.5Gb/s Fibre-Channel, the transceiver CDRs need to be placed in "8GFC" mode by changing the register value in EEPROM-Table 0, Byte 117, Bit 0.

- EEPROM Byte 117, Bit 0 value for 8GFC operation: Bit 0 = 1
- EEPROM Byte 117, Bit 0 value for standard 10G operation: Bit 0 = 0

IX. Mechanical Specifications

Finisar's XFP transceivers are compliant with the dimensions defined by the XFP Multi-Sourcing Agreement (MSA).

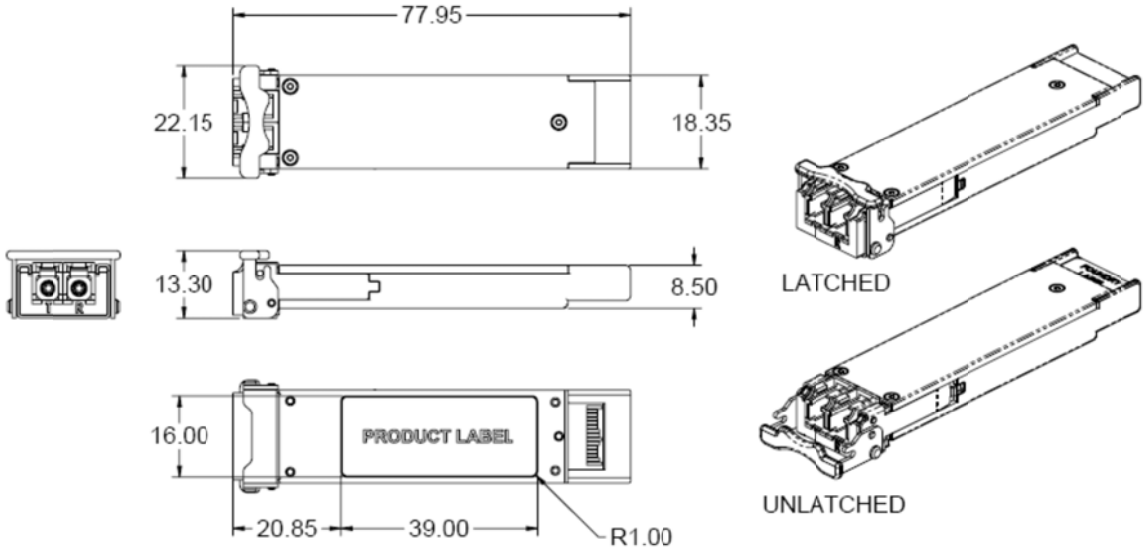

XFP Transceiver (dimensions are in mm)

X. PCB Layout and Bezel Recommendations

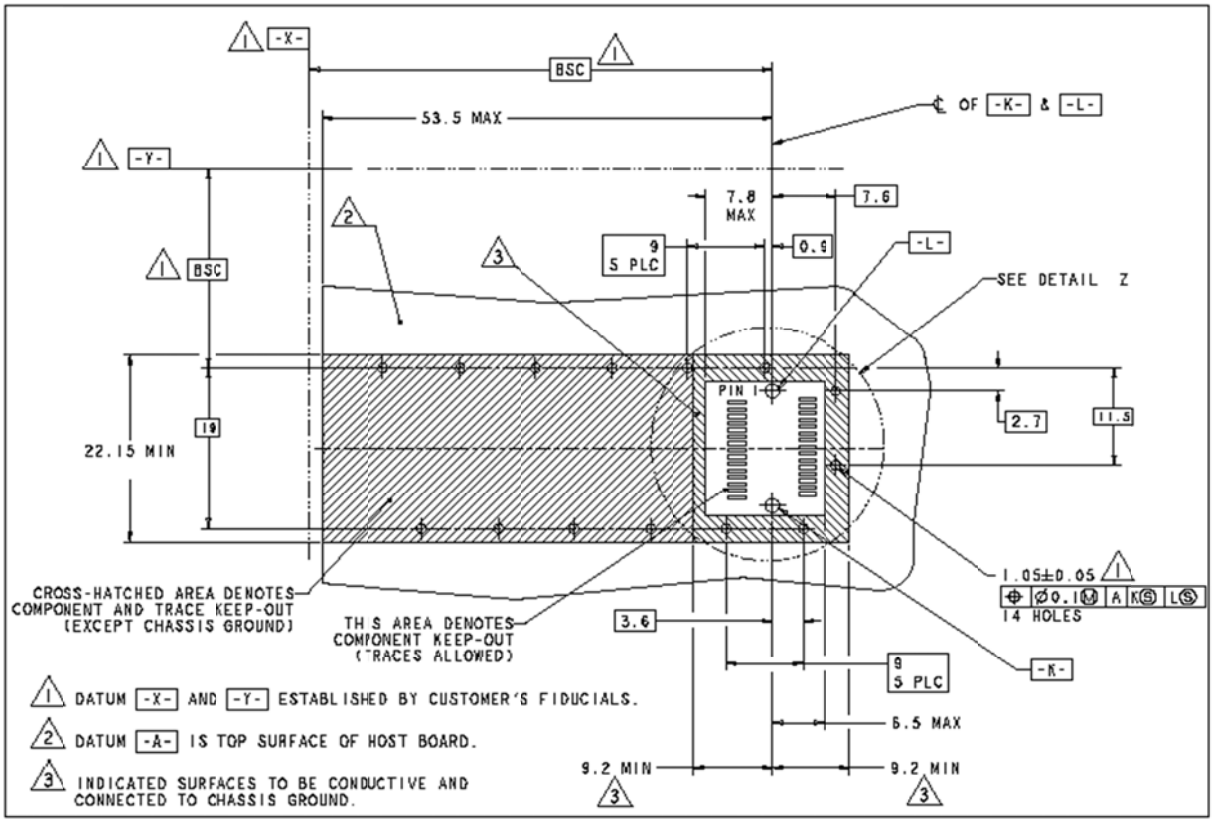

XFP Host Board Mechanical Layout (dimensions are in mm)

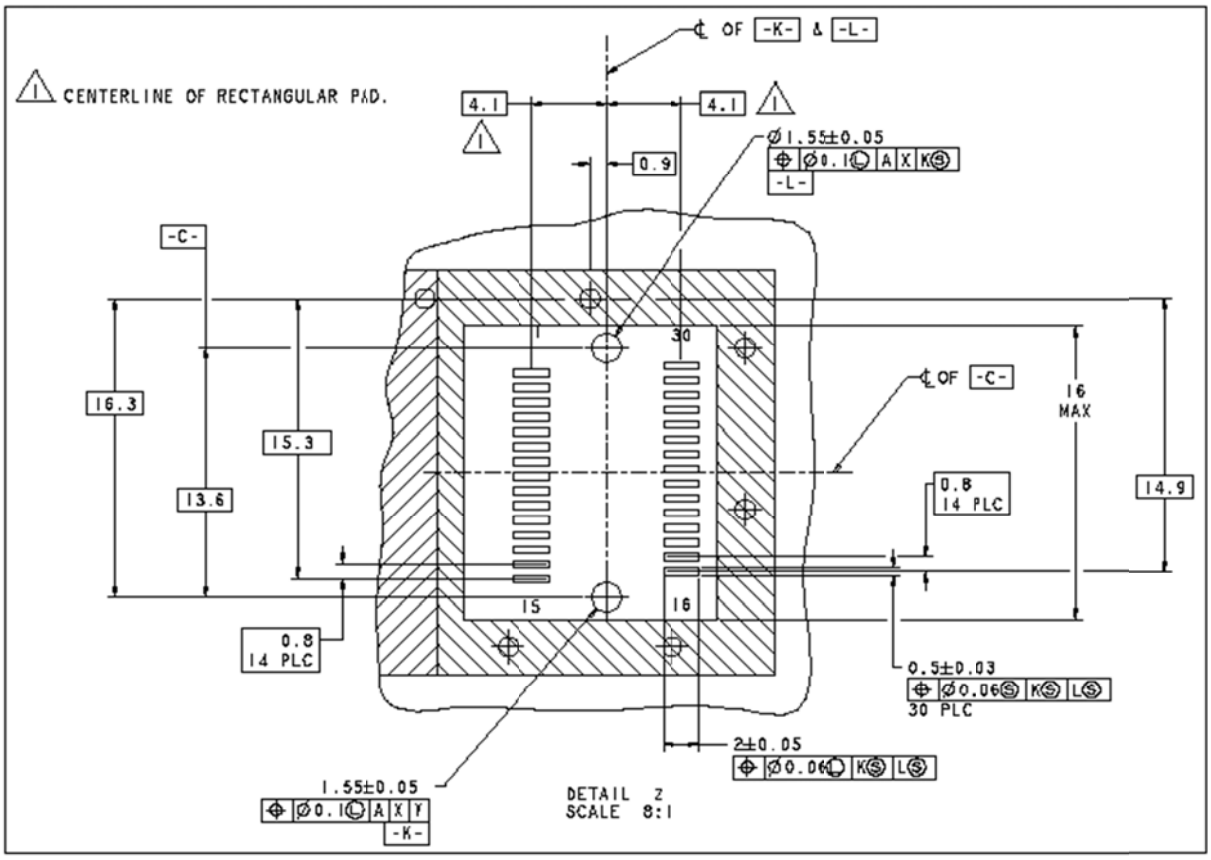

XFP Detail Host Board Mechanical Layout (dimensions are in mm)

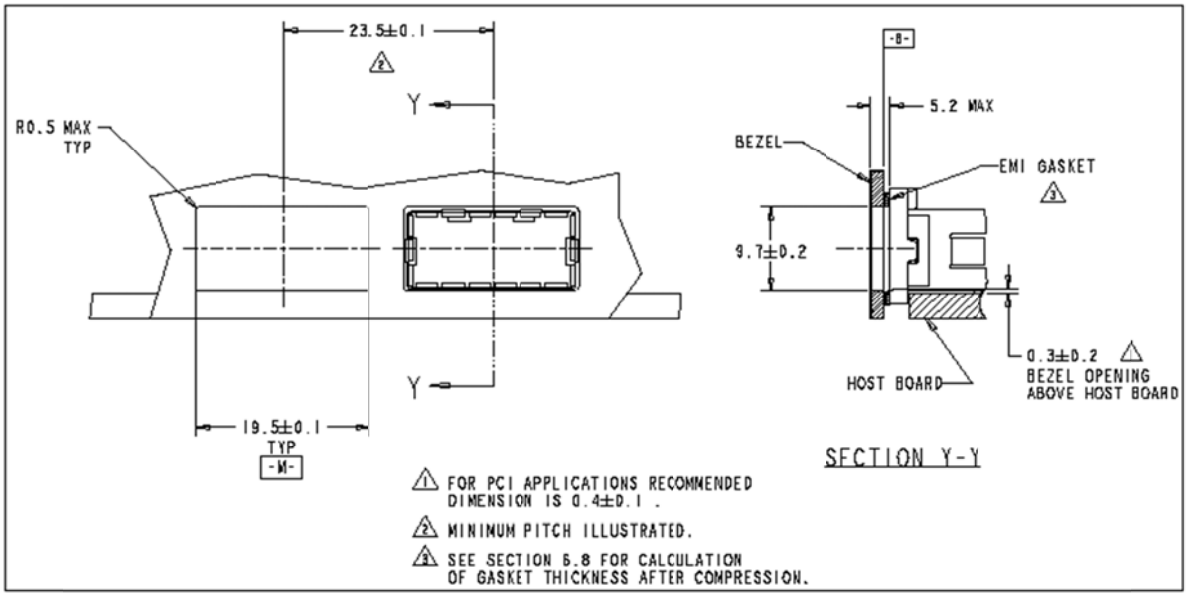

XFP Recommended Bezel Design (dimensions are in mm)

XI. References

1. 10 Gigabit Small Form Factor Pluggable Module (XFP) Multi-Source Agreement (MSA), INF-8077i, Rev 4.5 – August 2005. Documentation is currently available at http://www.xfpmsa.org/

2. Application Note AN-2035: "Digital Diagnostic Monitoring Interface for XFP Optical Transceivers" – Finisar Corporation, December 2003

3. Directive 2002/95/EC of the European Council Parliament and of the Council, "on the restriction of the use of certain hazardous substances in electrical and electronic equipment". January 27, 2003.

4. "Application Note AN-2038: Finisar Implementation Of RoHS Compliant Transceivers", Finisar Corporation, January 21, 2005.

XII. For More Information

Finisar Corporation
1389 Moffett Park Drive
Sunnyvale, CA 94089-1133
Tel. 1-408-548-1000
Fax 1-408-541-6138
sales@finisar.com
www.finisar.com